



Product Specification

Part Number TSTATBBP220-LA

DESCRIPTION

The Bryant Tempsure Commercial Programmable Light-Activated Thermostat provides the following features and benefits:

- electric heat, gas heat, and heat pump compatibility
- light-activated operation
- seven-day programmable clock; 4 time periods per day
- holiday scheduling (up to 99 consecutive days)
- zone temperature control to 1-degree accuracy
- auto-changeover
- schedule override
- Neverlost™ non-volatile memory (no batteries required)
- service filter indicator
- energy saving Smart Fan
- five-minute compressor time guard
- Title 24 compliance
- copy command for programming schedules
- large Thermoglow™ display
- three security levels with keypad lockout

STANDARD FEATURES

Tempsure commercial programmable light-activated thermostats provide flexibility for every application, reliability for year-round comfort, and ease of programming for quick installation.

This wall-mounted, low voltage device maintains room temperature by controlling operation of an HVAC (heating, ventilation, and air conditioning) system. Separate heating and cooling set points and auto-changeover capability allow occupied and unoccupied programming for energy savings.

The thermostat can be configured to accept different equipment configurations, including single-stage heating and cooling, 2-stage heating and cooling, heat pumps, gas or electric heating, and hydronic systems.

The thermostat allows up to 4 time/temperature settings per 24-hour period. Each thermostat stores schedules for 7 independent days. Batteries are not required. During power interruption, the internal memory stores schedules for an unlimited time while the clock will continue to run for at least 48 hours.

THERMOSTAT can be programmed and configured for use with many different applications including single-stage heating and cooling, 2-stage heating and cooling, heat pumps, gas or electric heating, and hydronic systems.

LIGHT-ACTIVATED OPERATION with built-in light sensor maximizes energy savings by placing the thermostat in occupied mode only when lights are on in the room. The thermostat stays in unoccupied mode when the lights are off. The light sensitivity of the sensor can be adjusted quickly and easily with the sensor adjustment screw provided on the thermostat. Light activation is a perfect complement to motion sensor lighting installations.

A 7-DAY CLOCK is provided with 3 occupied and unoccupied time periods for scheduling heating and cooling set points.

Occupied and unoccupied schedules save energy by changing zone set points during unoccupied times.

HOLIDAY PROGRAMMING allows the thermostat to run under unoccupied temperature set points for up to 99 consecutive days. This is especially beneficial in schools or businesses where long breaks are common.

ONE-DEGREE CONTROL ACCURACY precisely controls room temperature within 1 degree of user set point. The thermostat uses a laser-trimmed, solid-state sensor.

SCHEDULE OVERRIDE returns the system to occupied set points if heating or cooling is needed during unoccupied hours. The override is adjustable in 30-minute increments and returns the system to unoccupied mode when override expires.

NEVERLOST MEMORY PROTECTION on the thermostat eliminates the need to reprogram the thermostat after power outages. Comfort programming and configuration will remain intact indefinitely. Clock and day of the week settings will be retained for a minimum of 48 hours.

SERVICE FILTER INDICATOR lets maintenance personnel know when the filter needs cleaning or replacing, which aids in equipment efficiency and prolongs equipment life.

ENERGY SAVING SMART FAN is configured for automatic and continuous operation. During automatic operation, the fan will only run when the system calls for heating or cooling. In continuous operation, the fan will run continuously in occupied time periods, but will only run during unoccupied periods when the system calls for heating or cooling.

FIVE-MINUTE COMPRESSOR TIME GUARD protects HVAC equipment by preventing compressor short cycling and limits the number of cycles per hour with an adjustable cycle limit.

TITLE 24 COMPLIANCE meets specified requirements for all California commercial installations.

COPY COMMAND for programming schedules saves time when multiple daily schedules are similar.

THERMOGLOW DISPLAY is large and easy to read. Backlit display allows programming in poorly lit areas and can be configured for button activation or continuous lighting. A single adjustment shows temperature in Celsius or Fahrenheit.

FOUR TIME PERIODS per day allow flexible scheduling for every application. Start and stop times along with heating and cooling set points are easily entered into the schedule.

THREE LEVELS OF SECURITY AND KEYPAD LOCKOUT protect against unauthorized usage of the thermostat. Unattractive and bulky locking covers are not necessary. Schedules, set points, and thermostat configurations are protected by locking out keypad operation. An easily memorized button sequence unlocks the keypad and allows access to configuration, set point, and scheduling information.

AGENCY APPROVALS

Complies with FCC Part 15 rules. Thermostat does not cause harmful interference and accepts all interference received.

Underwriters' Laboratories (UL) and UL, Canada Approval for thermostats. These thermostats are considered low voltage devices by UL and do not require UL approval. As an added assurance to the quality of the thermostats, these thermostats are UL listed.

Title 24 Compliance meets specified requirements of programming capability for all California commercial installations.

Meets European Community (CE) Standards. Thermostat conforms to European (CE) requirements and is designed in accordance with IEC (International Electrotechnical Commission) standards.


SPECIFICATIONS

Recommended Wiring	22 AWG (36 ft max) 18 AWG (100 ft max)
Operation Temperature F (C)	41 to 104 (5 to 40)
Storage Temperature F (C)	-40 to 135 (-40 to 57)
Operating Relative Humidity	0 to 95% (non-condensing)
Dimensions (in.)	4.5 x 4.3 x 1.1
Power	5 va at 24 fac, 60 Hz

AWG — American Wire Gage



DIMENSIONS

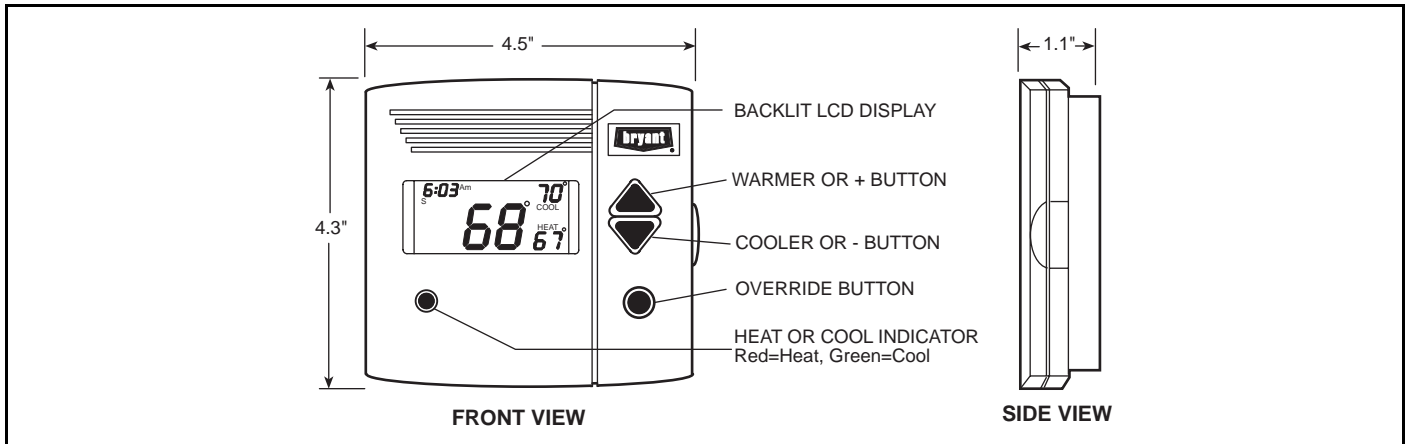

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
UNIT MUST BE INSTALLED IN ACCORDANCE WITH INSTALLATION INSTRUCTIONS